


Safe'n'Sound®

Fire and Soundproofing Insulation

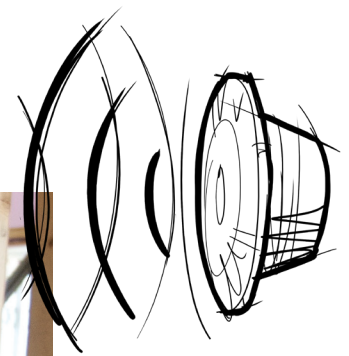

ROCKWOOL Safe'n'Sound® is a stone wool insulation for use in interior partitions of residential wood and steel stud construction where superior fire resistance and acoustical performance are required.

Safe'n'Sound® is noncombustible and will not produce toxic smoke or promote flames spreading, even when directly exposed to fire. This adds valuable extra time for people to reach safety and for fire services personnel to arrive.

Available in 3" and 6" thicknesses, Safe'n'Sound has excellent acoustical dampening properties and provides an easy friction fit into wall, ceiling and floor applications. It is GREENGUARD Gold Certified and contributes to a healthier indoor environment.

Learn more at rockwool.com/safensound

A Quiet Space

A high density and unique fiber structure absorbs sound and reduces noise traveling from one room to another, improving occupant comfort.



Safe'n'Sound®

Residential Fire and Soundproofing Insulation

Technical Data Sheet

Batt Insulation 07210 & 09820*
Acoustic Blanket Insulation 09 81 16**

ROCKWOOL Safe'n'Sound® is a stone wool batt insulation for interior partitions of wood and steel frame construction where superior fire resistance and acoustical performance is required.

	Performance	Test Standard																											
Compliance	Mineral Fiber Blanket Thermal Insulation, Type 1 Compliant	ASTM C665																											
	Mineral Fiber Thermal Insulation for Buildings, Type 1 Compliant	CAN/ULC S702																											
Reaction to Fire	Flame Spread Index = 0; Smoke Developed Index = 0	ASTM E84 (UL 723) ¹																											
	Flame Spread Rating = 0; Smoke Developed Classification = 0	CAN/ULC S102																											
	Combustibility of Materials at 750 °C - Noncombustible	ASTM E136																											
	Determination of Non-combustibility of Building Materials - Non-combustible	CAN/ULC S114																											
Nominal Density	2.5 lbs/ft ³ (40 kg/m ³) [†]	ASTM C167																											
Thickness	Product is available in 3" (76 mm) and 6" (152 mm) thicknesses																												
Dimensions	Wood Stud 16" (406 mm) on center: 15.25" x 47" (387 mm x 1194 mm) Wood Stud 24" (610 mm) on center: 23" x 47" (584 mm x 1194 mm) I-Joist 16" (402 mm) on center: 16.25"x48 (413 mm x 1219 mm) I-Joist 19.2" (488mm) on center: 19.2" x 47" (488 mm x 1194 mm) Steel Stud 16" (406 mm) on center: 16.25" x 48" (413 mm x 1219 mm) Steel Stud 24" (610 mm) on center: 24.25" x 48" (616 mm x 1219 mm)																												
Acoustical Performance	<table border="1"> <thead> <tr> <th>Thickness (In.)</th> <th>125 Hz</th> <th>250 Hz</th> <th>500 Hz</th> <th>1000 Hz</th> <th>2000Hz</th> <th>4000 Hz</th> <th>NRC</th> <th>SAA</th> </tr> </thead> <tbody> <tr> <td>3</td> <td>0.44</td> <td>0.98</td> <td>1.22</td> <td>1.14</td> <td>1.09</td> <td>1.07</td> <td>1.10</td> <td>1.11</td> </tr> <tr> <td>6</td> <td>1.38</td> <td>1.29</td> <td>1.30</td> <td>1.22</td> <td>1.15</td> <td>1.08</td> <td>1.25</td> <td>1.25</td> </tr> </tbody> </table>	Thickness (In.)	125 Hz	250 Hz	500 Hz	1000 Hz	2000Hz	4000 Hz	NRC	SAA	3	0.44	0.98	1.22	1.14	1.09	1.07	1.10	1.11	6	1.38	1.29	1.30	1.22	1.15	1.08	1.25	1.25	ASTM C423
	Thickness (In.)	125 Hz	250 Hz	500 Hz	1000 Hz	2000Hz	4000 Hz	NRC	SAA																				
3	0.44	0.98	1.22	1.14	1.09	1.07	1.10	1.11																					
6	1.38	1.29	1.30	1.22	1.15	1.08	1.25	1.25																					



Issued: 11-2025
Supersedes 07-2025

NOTE: *Master Format 1995 Edition **Master Format 2004 Edition. As ROCKWOOL has no control over installation design and workmanship, accessory materials or application conditions, ROCKWOOL does not warranty the performance or results of any installation containing ROCKWOOL's products. ROCKWOOL's overall liability and the remedies available are limited by the general terms and conditions of sale. This warranty is in lieu of all other warranties and conditions expressed or implied, including the warranties of merchantability and fitness for a particular purpose. NOTE 1: Meets Class A requirements for flame spread and smoke-developed indices as per IBC.

[†]Density will change with thickness. Density is not a performance criteria but is commonly referred to when specifying insulation. Actual density is the true density of the insulation and Nominal density is the effective density of the insulation relative to a historic benchmark where the insulation contained 40% non-fibrous content also known as Shot (ASTM C612-99). Please contact ROCKWOOL for more information.



8024 Esquesing Line, Milton, ON L9T 6W3
Tel: 800-265-6878 • Fax: 800-991-0110
rockwool.com