

Curtainrock® 40

Exterior wall insulation: Curtain walls



ROCKWOOL Curtainrock® 40 is a stone wool insulation board designed for use as the insulation for curtain wall spandrels and mullion covers. Along with ROXUL Safe®, it serves as a primary insulation component within a range of ASTM E2307 tested and approved perimeter fire containment systems.


Available unfaced or with a reinforced foil facing, Curtainrock® 40 is noncombustible and fire resistant, and will not develop smoke or promote flame spread when exposed to fire.

Curtainrock® 40 offers superior thermal and acoustic performance, along with moisture resistance and noncorrosive properties, and is resistant to mold and mildew growth.

Learn more at rockwool.com/curtainrock

Fire resistance

Curtainrock® 40 and ROXUL Safe® are UL/ULC/Intertek approved for perimeter fire containment systems.

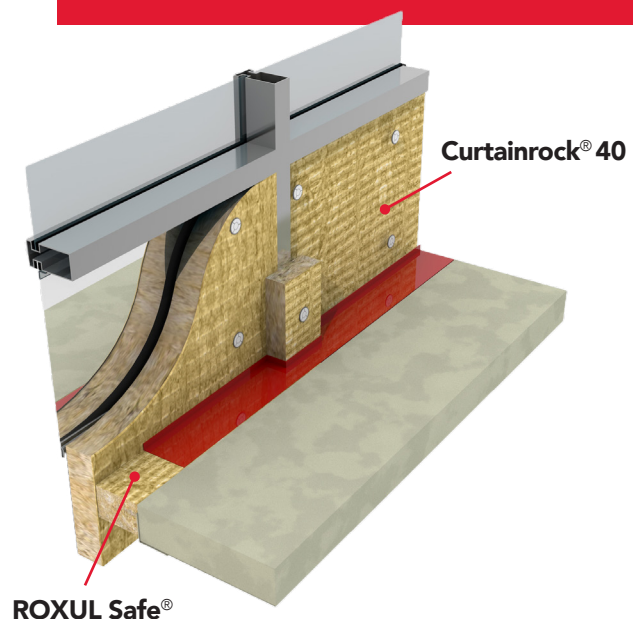

Curtainrock® 40

Exterior wall insulation: Curtain walls

Technical data sheet

Board Insulation 07210* • Board Insulation 07 21 13**
Curtain Wall & Glazed Assemblies 08 44 00**

ROCKWOOL Curtainrock® 40 is a semi-rigid, stone wool insulation board designed to provide enhanced fire protection and long-term thermal resistance in perimeter fire containment systems.

	Performance	Test standard	
Compliance	Mineral fiber block and board thermal insulation - Type IVB compliant Mineral fiber thermal insulation for buildings - Type 1 compliant MEA approval, New York City approval	ASTM C612 CAN/ULC S702 331-97-M	
Reaction to fire	Flame spread index = 0; Smoke developed index = 0 Flame spread rating = 0; Smoke developed classification = 0 Combustibility of materials at 750 °C - Noncombustible Determination of non-combustibility of building materials - Non-combustible	ASTM E84 (UL 723) ¹ CAN/ULC S102 ASTM E136 CAN/ULC S114	
Density	Minimum 4.0 lbs/ft ³ (64 kg/m ³)	ASTM C303	
Dimensional stability	Linear shrinkage - ≤ 1 % @ 1200 °F (649 °C)	ASTM C356	
Corrosion resistance	Corrosiveness to steel - Passed	ASTM C1617	
Thermal resistance	R-Value / inch @ 75 °F RSI value / 25.4 mm @ 24 °C	4.3 hr.ft ² .F/Btu 0.75 m ² K/W	ASTM C518 (C177)
Reaction to moisture	Water vapor sorption - 0.01 vol% Determination of fungi resistance - Passed	ASTM C1104 ASTM C1338	
Thickness	Product is available in 2" - 6" (50.8 mm - 152.4 mm)		
Dimensions	24" x 48" (610mm x 1,219 mm), 36" x 60" (914 mm x 1624 mm) and 48" x 72" (1,219 mm x 1,829 mm)		
Facing	Product is available with a reinforced foil facer		



For more information regarding the certifications and listings of our stone wool insulation products, please visit:

rockwool.com/north-america/about-us/sustainability/certifications-and-listings/

Issued 04-2026
Supersedes 09-2025

¹ Meets Class A requirements for flame spread and smoke-developed indices as per IBC.
* Master Format 1995 Edition. ** Master Format 2004 Edition.

As ROCKWOOL has no control over installation design and workmanship, accessory materials or application conditions, ROCKWOOL does not warranty the performance or results of any installation containing ROCKWOOL's products. ROCKWOOL's overall liability and the remedies available are limited by the general terms and conditions of sale. This warranty is in lieu of all other warranties and conditions expressed or implied, including the warranties of merchantability and fitness for a particular purpose. Sustainability certifications may vary by product and region.