

# DuctWrap and DuctSlab

Non-combustible stone wool insulation  
for ductwork.

Manufactured from non-combustible stone wool insulation, DuctSlab is a semi-rigid slab, whereas DuctWrap is a lightweight flexible roll. Both products come with a reinforced aluminium foil facing.

- CE marked in accordance with BS EN 14303: 2009+A1: 2013.
- Non-combustible – classified A1 in accordance with BS EN 13501-1: 2018.



# DuctWrap and DuctSlab

## APPLICATIONS


DuctWrap and DuctSlab are designed for the thermal insulation of ductwork and water storage tanks.

### Product required per metre of duct

The formulae to determine the length of DuctWrap or DuctSlab are shown to the right.

The required thickness of DuctWrap and DuctSlab insulation will depend on such factors as duct air temperatures, ambient air temperatures, and the designed heat losses.

For further information, please see the tables in the [ROCKWOOL Guide to BS 5422: 2023](#).

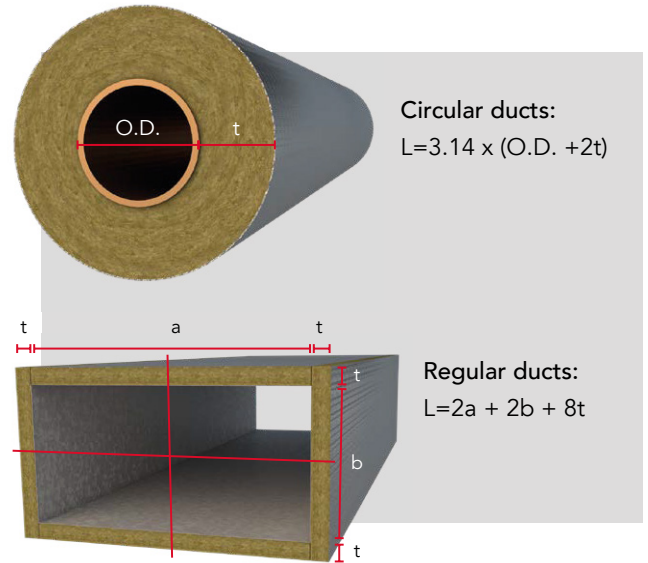

## PERFORMANCE

### Fire

DuctWrap and DuctSlab have a reaction to fire classification of A1 in accordance with EN 13501-1: 2018.

### Thermal

Temperature	10°C	50°C	100°C	150°C	200°C
DuctSlab $\lambda$ (W/mK)	0.035	0.042	0.054	0.069	0.086
DuctWrap $\lambda$ (W/mK)	0.034	0.040	0.050	0.063	0.079

For further information on the declared performance characteristics, please refer to the products' [Declaration of Performance](#).

### Service temperature and limiting surface temperature

DuctWrap and DuctSlab are suitable for service temperatures of up to 230°C.

In order to maintain the bond strength of the foil facing, the insulation thickness should be specified to maintain a maximum outer surface temperature no greater than 80°C.

## PRODUCT INFORMATION

### DuctWrap

Product name	Thickness (mm)	Width (mm)	Length (mm)
DuctWrap	25	1000	5000
DuctWrap	40	1000	4000
DuctWrap	50	1000	5000

### DuctSlab

Product name	Thickness (mm)	Width (mm)	Length (mm)
DuctSlab	40	600	1000
DuctSlab	50	600	1000

# DuctWrap and DuctSlab

## STANDARDS AND APPROVALS

### Certificates

DuctWrap and DuctSlab products are CE marked in accordance with BS EN 14303: 2015. For more information, please visit [rockwool.com/uk/dop](http://rockwool.com/uk/dop).

DuctWrap and DuctSlab can be used to satisfy the requirements of BS 5422: 2023 'Method for specifying thermal insulating materials'.

The product has been authorised for use in LUL surface and sub-surface premises when installed in accordance with this data sheet – please refer to the LUL Approved Product Register website [LU-apr.co.uk](http://LU-apr.co.uk) for specific details.




## SPECIFICATION CLAUSES

### Typical specification clauses for ductwork

The following specifications are for guidance purposes only and should be read in conjunction with recommendations given in BS 5970: 2012.

#### 1. External applications (weather protected)

The duct insulation is to be DuctSlab manufactured by ROCKWOOL Limited, Pencoed, Bridgend, CF35 6NY, secured to the ducting by means of a suitable adhesive and/or self-adhesive stick pins\*, applied in accordance with the manufacturer's recommendations. All joints are to be securely taped with 75mm wide plain soft aluminium foil self-adhesive tape (Idenden T303) to maintain a continuous vapour barrier. The final surface treatment is to be:

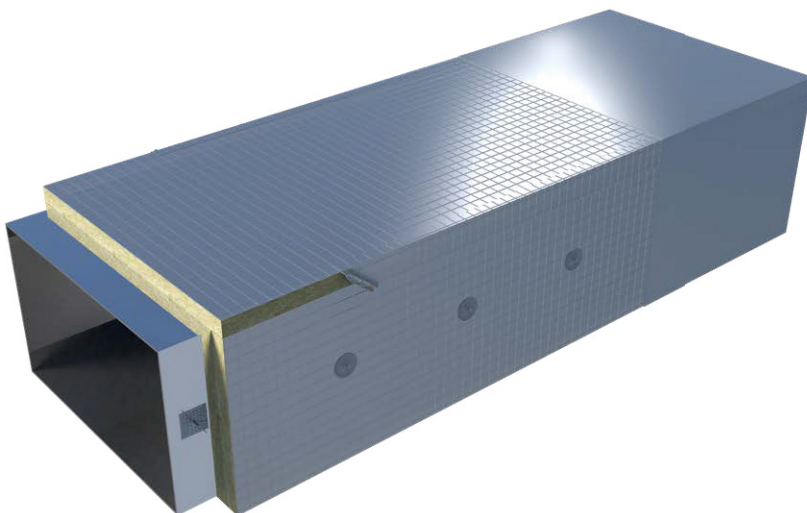

*External application of DuctSlab with weather protection*

\*Fixing centres will depend on the size of the duct and the weight of the insulating material. The excess projection of the pins above the washers should be cut off, and the washer sealed using the soft aluminium self-adhesive tape to maintain the integrity of the vapour barrier.

The maximum surface temperature of the ductwork should not exceed the recommended maximum service temperature of the self-adhesive stick pins.

# DuctWrap and DuctSlab

a) Flat aluminium zinc coated steel protection	Mild steel sheet continuously hot dipped with 185g/m <sup>2</sup> aluminium-zinc coating to BS EN 10346: 2009/2015 applied directly to insulating material. 0.4mm thick flat sheet. Fixed and installed in accordance with BS 5970: 2012.
b) Ribbed aluminium-zinc coated steel protection	Mild steel sheet continuously hot dipped with 185g/m <sup>2</sup> aluminium-zinc coating to BS EN 10346: 2009/2015 applied directly to insulating material. 0.4mm thick ribbed sheet. Fixed and installed in accordance with BS 5970: 2012.
c) Aluminium sheeting protection	Apply flat (embossed) or profiled aluminium cladding directly to insulating material. 0.56mm thick on pipework. 0.71mm thick on ductwork. Fixed and installed in accordance with BS 5970: 2012.
d) Mild steel sheet	Mild steel sheet continuously hot dipped with aluminium-zinc coating to BS EN 10326, applied directly to insulating material. Fixed and installed in accordance with BS 5970: 2012.
e) Self adhesive weather resistant zero perm multi-layer laminate	Apply multi-layer laminate directly over ducts and pipework, ensuring 75mm overlap for a complete vapour barrier. Fixed and installed in accordance with BS 5970: 2012.
f) Polyisobutylene	Polyisobutylene, minimum thickness 0.8mm. Fixed and installed in accordance with BS 5970: 2012.
g) Roofing felt protection	Secure in position with galvanized wire netting, of 1mm x 25mm mesh. Finish with two coats of black bituminous paint. Fixed and installed in accordance with BS 5970: 2012.

## NBS clauses

The NBS clauses that include DuctWrap and DuctSlab can be found on NBS Source: [source.thenbs.com](https://source.thenbs.com)

# DuctWrap and DuctSlab

## 2. Horizontal ducts concealed from view

To be insulated with DuctWrap/DuctSlab having a factory applied reinforced aluminium foil facing. Joints to be securely taped with 75mm minimum wide soft aluminium self-adhesive tape. The insulation on the underside of the ducting to be additionally secured by suitable insulation hangers at 300mm centres.

The whole to be further supported by means of:-

- 19 - 22 SWG x 50mm mesh galvanised wire netting. Where a vapour barrier is required, care to be taken when applying wire mesh support to avoid damaging the aluminium foil.

or

- Aluminium bands, circumferential at nominal 300mm centres. Bands located over the outer surface, typically 50mm from the circumferential joint of the DuctWrap and DuctSlab. Do not over-tighten the aluminium bands, as this will locally reduce the thickness of the insulation and reduce the thermal efficiency.

N.B. Additional measures may be necessary to prevent sagging.

or

- Subject to the client's approval, alternative fixings can be used in place, or alongside the above.

For operating temperatures below ambient vapour, a barrier is required.

Provision should be made at all exposed edges to ensure continuation of the aluminium foil to the duct surface. Aluminium foil to be secured with 75mm wide aluminium self-adhesive tape (i.e. Idenden T303).

Where support pins/hangers puncture the foil, they should be sealed using aluminium foil tape to maintain the vapour barrier.

# DuctWrap and DuctSlab

## BUILDING SAFETY AND PRODUCT USE

### LEGAL NOTICES

#### General safety requirements – Building Safety Act 2022

ROCKWOOL Limited is committed to supporting specifiers, resellers, and users of ROCKWOOL products for the full life cycle of the product to comply with the obligations and responsibilities set out in the Building Safety Act 2022. With regard to the general safety requirements of the Act, ROCKWOOL Limited cannot control or foresee every situation where its products might be used. We therefore strongly advise that specifiers, resellers, and users contact us where use of ROCKWOOL products is contemplated in applications different from those explicitly described in the latest, relevant ROCKWOOL product datasheets; especially in applications that can be reasonably foreseen as critical to safety.

ROCKWOOL Limited reserves the right to amend the specification of its products without notice. Changes to the ROCKWOOL manufacturing process, or to pertinent regulations, may be reflected in changes to tested and certified product performance. Whilst ROCKWOOL Limited endeavours to keep its publications up to date, readers will appreciate that between publications there may be pertinent changes in the law or other developments affecting the accuracy of the information contained in our publications.

ROCKWOOL Limited does not accept responsibility for the consequences of using (including testing or certifying) its products in applications different from those explicitly described in the relevant ROCKWOOL product datasheets. Expert advice should be sought, and ROCKWOOL Limited should be contacted, where such different use is contemplated, or where the extent of any use described by ROCKWOOL Limited is in doubt.

#### The ROCKWOOL Trademark

ROCKWOOL® – our trademark

The ROCKWOOL trademark was initially registered in Denmark as a logo mark back in 1936. In 1937, it was accompanied with a word mark registration; a registration which is now extended to more than 60 countries around the world.

The ROCKWOOL trademark is one of the most important assets of the ROCKWOOL Group, and is therefore well-protected and defended by ROCKWOOL throughout the world.

If you require permission to use the ROCKWOOL logo for your business, advertising or promotion, you must apply for a Trade Mark Usage Agreement.

To apply, write to:  
[marketcom@rockwool.com](mailto:marketcom@rockwool.com)

#### Trademarks

Registered trademarks of the ROCKWOOL Group include but are not limited to:

ROCKWOOL®, RockClose®, RainScreen Duo Slab®, HardRock®, RockFloor®, Flexi®, RockFall®, FirePro®, DuctRock®, BeamClad®, NyRock®

© ROCKWOOL 2026.  
All rights reserved.

#### Photography and illustrations

The product illustrations are the property of ROCKWOOL Limited and have been created for indicative purposes only.

Unless indicated below, the photography and illustrations used in this guide are the property of ROCKWOOL Limited. We reserve all rights to the usage of these images.

If you require permission to use ROCKWOOL images, you must apply for a Usage Agreement.

To apply, write to:  
[marketcom@rockwool.com](mailto:marketcom@rockwool.com)

### HEALTH & SAFETY

A Material Safety Data Sheet is available and can be downloaded from [rockwool.com/uk](https://rockwool.com/uk) to assist in the preparation of risk assessments, as required by the Control of Substances Hazardous to Health Regulations (COSHH).

# DuctWrap and DuctSlab

Company:	ROCKWOOL Limited
Version:	Version 3.03 March 2026 <i>(to check this is the latest version, please refer to <a href="http://rockwool.com/uk">rockwool.com/uk</a>)</i>
Revised on:	03.03.2026
Product name:	DuctWrap and DuctSlab
Replaces version:	Version 3.02 February 2026
Changes made:	<ul style="list-style-type: none"><li>• Updated testing information</li></ul>
Additional information:	

*Please ensure you are using the latest version of this document by verifying it on our official website. Do not rely on printed or previously downloaded copies, as these may be out of date.*

*Please contact the ROCKWOOL Technical Support Team if you would like to access archived versions of this document.*

# DuctWrap and DuctSlab

## ROCKWOOL stone wool – safe to install and live alongside

There are no hazardous classifications associated with stone wool insulation manufactured by ROCKWOOL UK according to EU REACH and UK REACH regulations on health and the environment.

ROCKWOOL safe use instruction sheets and material safety data sheets (where applicable) can be downloaded [here](#).




### Sustainability

ROCKWOOL products are used to help enrich modern living, supporting more resilient and comfortable buildings.

We transform abundant, natural volcanic rock into stone wool insulation products that help our customers tackle energy consumption, noise pollution, fire resilience, and climate change challenges such as water scarcity and flooding.

Since our stone wool is endlessly recyclable with no loss in its performance properties, we can take back clean, uncontaminated new off-cuts, and unused ROCKWOOL stone wool insulation from construction sites in the UK. Our service, Rockcycle®, takes back our stone wool and recycles it back into production where it is used to make new ROCKWOOL products.

Our annual sustainability reports, which set out progress against our sustainability goals and further details of the positive impacts of using our products, can be found on our website.



### Environment

ROCKWOOL takes a fact-based, auditable approach to documenting our progress in maximising our products' positive impact and minimising the effect our operations have on the environment, backed by third-party references and methodologies. Further details can be found online in our annual sustainability report.

Our high-tech production process uses filters, pre-heaters, after-burners, and other cleaning and collection systems that help to reduce the effects of our manufacturing operations on the environment.

ROCKWOOL stone wool insulation does not contain (and has never contained) gases that have ozone depletion potential (ODP) or global warming potential (GWP).

