



# Thermal Insulation Cavity Slab 32

Thermal protection for masonry cavity walls.

ROCKWOOL Thermal Insulation Cavity Slab 32 is a full and partial fill insulation solution for use in external and party masonry cavity walls, and is suitable for use in new builds, renovations or extensions.

Thermal Insulation Cavity Slab 32 is available in 100mm or 150mm thicknesses.

- Low thermal conductivity of 0.032 W/mK.
- Thermal Insulation Cavity Slab 32 is able to resist temperatures of over 1,000°C, and achieves the highest Euroclass A1 non-combustibility classification as defined in EN 13501-1.
- Certified by the British Board of Agrément (BBA) and granted Certificate 22/6335.
- The batt features an additive to make the product water repellent.
- The batts come in a 455mm width to suit standard vertical wall tie spacings allowing a closely knitted joint with adjacent slabs.



## Designed to be recyclable

Improvements in packaging design are part of the transition towards a more sustainable society.

Our product packaging is 100% recyclable and produced using 30% recycled content.

# Thermal Insulation Cavity Slab 32



## APPLICATIONS

Thermal Insulation Cavity Slab 32 is designed for use in external masonry cavity walls to deliver thermal protection in residential, extension, and renovation work.

Thermal Insulation Cavity Slab 32 has been examined by the British Board of Agrément (BBA) and granted Certificate 22/6335 for use in all exposure zones for domestic and non-domestic buildings that are up to 25m in height.

The NHBC accepts the use of Thermal Insulation Cavity Slab 32 other than in very severe exposure locations with fair-faced masonry, provided it is installed, used, and maintained in accordance with the BBA Certificate, in relation to NHBC Standards, Chapter 6.1, External masonry walls.

## PERFORMANCE

### Thermal performance

Thermal Insulation Cavity Slab 32 has a thermal conductivity of 0.032 W/mK.

### Fire performance

Thermal Insulation Cavity Slab 32 is non-combustible achieving a reaction to fire classification of A1, as defined in EN 13501-1. It is suitable for use in buildings of every purpose group (as classified within table 0.1 of Approved Document B), also acting as a cavity barrier when tightly fitted between masonry leaves where an insulated wall connects with an uninsulated wall cavity.

### Acoustic performance

The non-directional fibre orientation and density of ROCKWOOL stone wool helps absorb sound waves and dampen vibrations, reducing the transmission of external noise when used in external wall applications.


# Thermal Insulation Cavity Slab 32

## TYPICAL U-VALUES

### Application performance – Full fill application

102mm facing brick outer skin, Thermal Insulation Cavity Slab 32 Full Fill, 100mm internal concrete block (various densities). Internal finishes: light plaster or plasterboard on dab.

Inner block W/mK	Dense 1900-2250kg/m <sup>3</sup> 1.130 W/mK		Medium dense 1400-1450kg/m <sup>3</sup> 0.470 W/mK		Aircrete Hi Strength 750kg/m <sup>3</sup> 0.190 W/mK		Aircrete Standard 600kg/m <sup>3</sup> 0.150 W/mK	
	Light plaster	Plasterboard on dab	Light plaster	Plasterboard on dab	Light plaster	Plasterboard on dab	Light plaster	Plasterboard on dab
	U-value W/m <sup>2</sup> K	U-value W/m <sup>2</sup> K	U-value W/m <sup>2</sup> K	U-value W/m <sup>2</sup> K	U-value W/m <sup>2</sup> K	U-value W/m <sup>2</sup> K	U-value W/m <sup>2</sup> K	U-value W/m <sup>2</sup> K
100	0.28	0.27	0.27	0.26	0.26	0.25	0.25	0.24
150	0.20	0.19	0.19	0.19	0.18	0.18	0.18	0.18

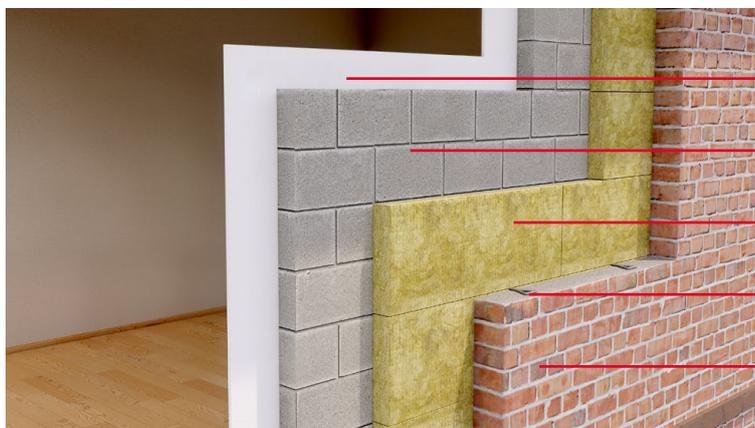


- Plasterboard on dabs OR light plaster
- Concrete block inner leaf
- Thermal Insulation Cavity Slab 32
- Cavity wall tie
- Facing brick outer skin

### Application performance – Partial fill application

102mm facing brick outer skin, Thermal Insulation Cavity Slab 32 Full Fill, 100mm internal concrete block (various densities). Internal finishes: light plaster or plasterboard on dab.

Inner block W/mK	Dense 1900-2250kg/m <sup>3</sup> 1.130 W/mK		Medium dense 1400-1450kg/m <sup>3</sup> 0.470 W/mK		Aircrete Hi Strength 750kg/m <sup>3</sup> 0.190 W/mK		Aircrete Standard 600kg/m <sup>3</sup> 0.150 W/mK	
	Light plaster	Plasterboard on dab	Light plaster	Plasterboard on dab	Light plaster	Plasterboard on dab	Light plaster	Plasterboard on dab
	U-value W/m <sup>2</sup> K	U-value W/m <sup>2</sup> K	U-value W/m <sup>2</sup> K	U-value W/m <sup>2</sup> K	U-value W/m <sup>2</sup> K	U-value W/m <sup>2</sup> K	U-value W/m <sup>2</sup> K	U-value W/m <sup>2</sup> K
100	0.27	0.26	0.26	0.25	0.25	0.24	0.24	0.23
150	0.19	0.18	0.19	0.18	0.18	0.17	0.18	0.17

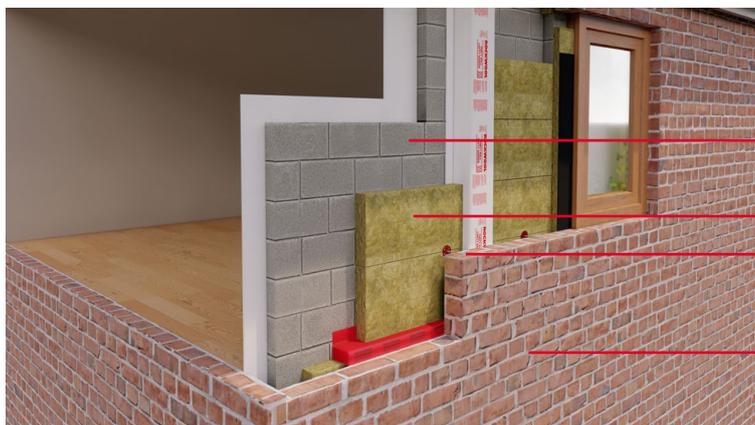

- Inner leaf blockwork
- Thermal Insulation Cavity Slab 32
- Wall ties
- Outer leaf facing brickwork

# Thermal Insulation Cavity Slab 32

## PRODUCT INFORMATION

Thickness	Thermal resistance m <sup>2</sup> K/W	Width (mm)	Length (mm)	Pieces/ pack	Area/ pack (m <sup>2</sup> )	Packs/ pallet	Pieces/ pallet
100	3.10	455	1200	4	2.18	12	48
150	4.69	455	1200	2	1.09	16	32

## ADDITIONAL INFORMATION

### Durability

Tests of our stone wool recovered from old buildings have shown that it retains its performance characteristics – thermal, mechanical, fire resistance – for at least 50 years, and probably longer. A test of a 65-year-old stone wool sample found in 2023 during a renovation of Copenhagen airport showed that these characteristics had not diminished after 65 years.\*

*\*Testing done at Danish Technical Institute (DTI) in 2023, "Testing ROCKWOOL insulation from CPH airport hangar 4"*

### Water resistance and moisture

ROCKWOOL stone wool insulation is water repellent and non-hygroscopic, meaning it will not absorb water from the surrounding environment. It retains its thermal performance even in humid conditions, helping to support the durability of the building fabric.

### Condensation

ROCKWOOL stone wool insulation is vapour permeable, reducing the risk of condensation, which can lead to rot, mould and humidity damage.

## STANDARDS AND APPROVALS

### Certificate

Manufactured in accordance with BS EN 13162:2012+A1:2015 Thermal insulation products for buildings. Factory made mineral wool (MW) products.  
Designation code: MW-EN13162-T4-DS(70,90)-WS-WL(P)-MU1.

Manufactured under ISO 14001 Environmental Management Systems, and ISO 9001 Quality Management Systems.

Certified by the British Board of Agrément (BBA) and granted Certificate 22/6252 as full fill and partial fill thermal insulation in external masonry cavity walls, up to 25 metres in height, in new domestic and non-domestic buildings (additional requirements apply for buildings above 12 metres).



## INSTALLATION

The product must be installed in accordance with the current ROCKWOOL guidelines. For further information please visit [rockwool.com/uk](https://rockwool.com/uk) or contact our Technical Solutions Team on 01656 868490.

# Thermal Insulation Cavity Slab 32

## BUILDING SAFETY AND PRODUCT USE

### LEGAL NOTICES

#### General safety requirements – Building Safety Act 2022

ROCKWOOL Limited is committed to supporting specifiers, resellers and users of ROCKWOOL products for the full life cycle of the product to comply with the obligations and responsibilities set out in the Building Safety Act 2022. With regard to the general safety requirements of the Act, ROCKWOOL Limited cannot control or foresee every situation where its products might be used. We therefore strongly advise that specifiers, resellers and users contact us where use of ROCKWOOL products is contemplated in applications different from those explicitly described in the latest, relevant ROCKWOOL product datasheets; especially in applications that can be reasonably foreseen as critical to safety.

ROCKWOOL Limited reserves the right to amend the specification of its products without notice. Changes to the ROCKWOOL manufacturing process, or to pertinent regulations, may be reflected in changes to tested and certified product performance. Whilst ROCKWOOL Limited endeavours to keep its publications up to date, readers will appreciate that between publications there may be pertinent changes in the law or other developments affecting the accuracy of the information contained in our publications.

ROCKWOOL Limited does not accept responsibility for the consequences of using (including testing or certifying) its products in applications different from those explicitly described in the relevant ROCKWOOL product datasheets. Expert advice should be sought, and ROCKWOOL Limited should be contacted, where such different use is contemplated, or where the extent of any use described by ROCKWOOL Limited is in doubt.

#### The ROCKWOOL Trademark

ROCKWOOL® - our trademark

The ROCKWOOL trademark was initially registered in Denmark as a logo mark back in 1936. In 1937, it was accompanied with a word mark registration; a registration which is now extended to more than 60 countries around the world.

The ROCKWOOL trademark is one of the most important assets of the ROCKWOOL Group, and is therefore well-protected and defended by ROCKWOOL throughout the world.

If you require permission to use the ROCKWOOL logo for your business, advertising or promotion, you must apply for a Trade Mark Usage Agreement.

To apply, write to:  
[marketcom@rockwool.com](mailto:marketcom@rockwool.com)

#### Trademarks

Registered trademarks of the ROCKWOOL Group include but are not limited to:

ROCKWOOL®, RockClose®, RainScreen Duo Slab®, HardRock®, RockFloor®, Flexi®, RockFall®, FirePro®, DuctRock®, BeamClad®, NyRock®

© ROCKWOOL 2025.  
All rights reserved.

#### Health and safety

A Material Safety Data Sheet is available and can be downloaded from [rockwool.com/uk](http://rockwool.com/uk) to assist in the preparation of risk assessments, as required by the Control of Substances Hazardous to Health Regulations (COSHH).

#### Photography and illustrations

The product illustrations are the property of ROCKWOOL Limited and have been created for indicative purposes only.

Unless indicated below, the photography and illustrations used in this guide are the property of ROCKWOOL Limited. We reserve all rights to the usage of these images.

If you require permission to use ROCKWOOL images, you must apply for a Usage Agreement.

To apply, write to:  
[marketcom@rockwool.com](mailto:marketcom@rockwool.com)

# Thermal Insulation Cavity Slab 32

Company:	ROCKWOOL Limited
Version:	Version 2.02 October 2025 <i>(to check this is the latest version, please refer to <a href="http://rockwool.com/uk">rockwool.com/uk</a>)</i>
Revised on:	22.10.2025
Product name:	Thermal Insulation Cavity Slab 32
Replaces version:	Version 2.01 August 2025
Changes made:	N/A
Additional information:	N/A

*Please ensure you are using the latest version of this document by verifying it on our official website. Do not rely on printed or previously downloaded copies, as these may be out of date.*

*Please contact the ROCKWOOL Technical Support Team if you would like to access archived versions of this document.*

# Thermal Insulation Cavity Slab 32

## ROCKWOOL stone wool – safe to install and live alongside

There are no hazardous classifications associated with stone wool insulation manufactured by ROCKWOOL UK according to EU REACH and UK REACH regulations on health and the environment.

ROCKWOOL safe use instruction sheets and material safety data sheets (where applicable) can be downloaded [here](#).




### Sustainability

ROCKWOOL products are used to help enrich modern living, supporting more resilient and comfortable buildings.

We transform abundant, natural volcanic rock into stone wool insulation products that help our customers tackle energy consumption, noise pollution, fire resilience, and climate change challenges such as water scarcity and flooding.

Since our stone wool is endlessly recyclable with no loss in its performance properties, we can take back clean, uncontaminated new off-cuts and unused ROCKWOOL stone wool insulation from construction sites in the UK. Our service, Rockcycle®, takes back our stone wool and recycles it back into production where it is used to make new ROCKWOOL products.

Our annual sustainability reports, which set out progress against our sustainability goals, and further details of the positive impacts of using our products can be found on our website.



### Environment

ROCKWOOL takes a fact-based, auditable approach to documenting our progress in maximising our products' positive impact and minimising the effect our operations have on the environment, backed by third-party references and methodologies. Further details can be found online in our annual sustainability report.

Our high-tech production process uses filters, pre-heaters, after-burners and other cleaning and collection systems that help to reduce the effects of our manufacturing operations on the environment.

ROCKWOOL stone wool insulation does not contain (and has never contained) gases that have ozone depletion potential (ODP) or global warming potential (GWP).

