


ProRox® BL 938^{SA}

ProRox BL 938^{SA} is a blanket type product used in thermal insulation of non-vibrating industrial equipment's where temperatures can be up to 350 deg Celcius. It is easy to install for large diameter vessel.

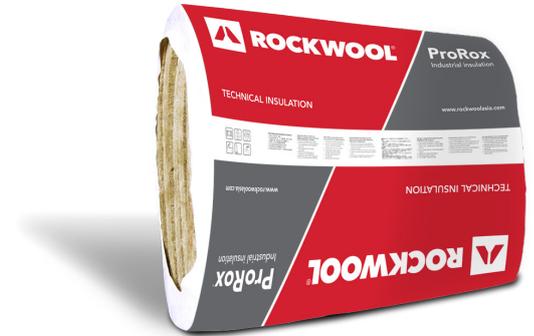

Product properties

Properties	Performance			Standard	
Thermal conductivity	T_m (°C)	50	100	150	ASTM C177
	λ (W/mK)	0.039	0.047	0.057	
Norminal density	60 kg/m ³			ASTM C167	
Maximum use temperature	350 °C			ASTM C411/C447	
Linear shrinkage	Less than 2% (at max service temperature)			ASTM C356	
Reaction to Fire	EuroClass A1 Surface burning characteristics; Flame spread = passed, Smoke development = passed			EN 13501-1 ASTM E84	
Chloride Content	Less than 10 ppm Conforms to the stainless steel corrosion specification as per ASTM C795			ASTM C871 ASTM C692/C871	
Moisture Absorption	Less than 1% weight			ASTM C1104/ C1104M	
Water Absorption	Less than 1 kg/m ²			EN 1609	

Note: All information and data for technical parameters are based on laboratory testing.

Compliance

- ProRox BL 938^{SA} Blanket comply with the requirements as set by internationally recognized standards like ASTM C553 Type I, II and III.

As ROCKWOOL has no control over insulation design and workmanship, accessory materials or applications conditions, ROCKWOOL does not warranty the performance or result of any installation containing ROCKWOOL products. ROCKWOOL's overall liability and the remedies available are limited by the general terms and conditions of sale. This warranty in lieu of all other warranties and conditions expressed or implied, including the warranties of merchantability and fitness for a particular purpose. ROCKWOOL Technical Insulation reserves the right to make necessary product changes at any time. Technical specifications are thus stated subject to change.

ROCKWOOL (Thailand) Limited

WHA Eastern Industrial Estate (Map Ta Phut)
No.1 Soi G2, Pakornsongkrohraj Road,
Huaypong, Muang, Rayong 21150 Thailand
T (+66) 3868 5107-110